




HELIX IIIA HX04

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL
IIIA

STANDARD	NIJ 0101.06
NIJ MODEL	GPHIIIA
SERIES	HX04
THREAT LEVEL	IIIA
GENDER	Neutral
AREAL DENSITY	0.95 psf
THINNESS	0.24"
PLY COUNT	44
SIZE RANGE	C1-C5
COMPOSITION	Duraflex® / Spectra Shield® Hybrid
STITCHING	Perimeter Stitch
PANEL COVER	Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

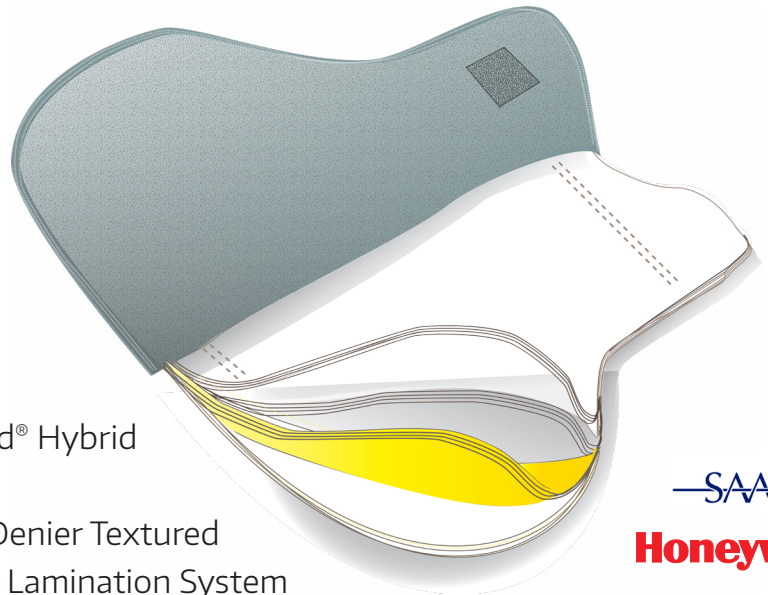

—SAATI
Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1820 fps	.44 Mag New V50	1671 fps
.357 Sig Conditioned V50	1785 fps	.44 Mag Conditioned V50	1663 fps
.357 Sig BFS	29.1 mm	.44 Mag BFS	38.0 mm
.357 Sig New RPI	1915.7	.44 Mag New RPI	1758.9
.357 Sig Conditioned RPI	1878.9	.44 Mag Conditioned RPI	1750.5

SPECIAL THREAT TESTING

Winchester 9mm 127gr SXT +P+ RA9TA | Speer .357 SIG 125gr GDHP | 7.62 X 25 85gr Tokarev
FN 5.7mm X 28mm 28/SS195 LF Hollow Point | FN 5.7mm X 28mm 40gr SS197 Blue Tip
Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
866-920-5940 | www.gharmor.com

READY IS THE ONLY OPTION.