

GH PRO


PRO II

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL

II

STANDARDS	NIJ 0101.04 2005 Interim Requirement
NIJ MODEL SERIES	GH-2-P2007 Pro
THREAT LEVEL	II
GENDER	Neutral
AREAL DENSITY	1.23 psf
THINNESS	0.28"
PLY COUNT	10
COMPOSITION	Aramid Laminate
STITCHING	Diamond Quilt
PANEL COVER	Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

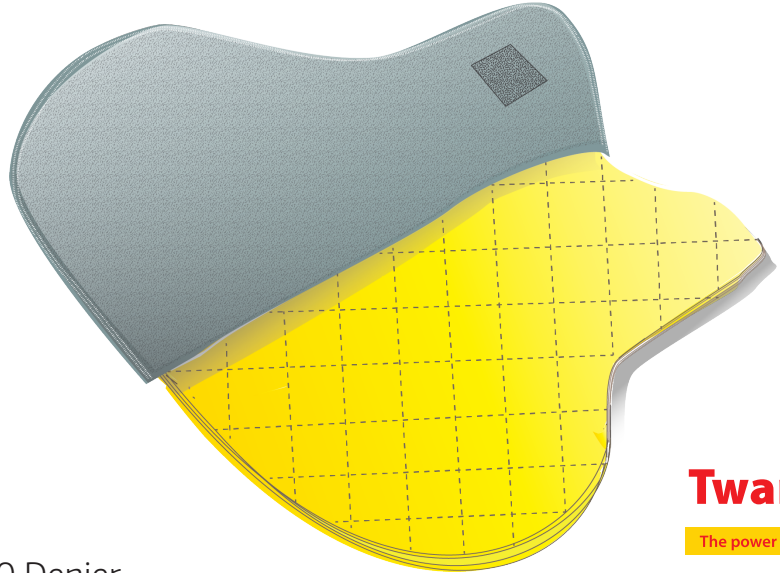

Twaron®

The power of Aramid



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm V50	1646 fps	.357 V50	1648 fps	.44 Mag V50	1588 fps
9mm RPI	1431	.357 RPI	1433	.44 Mag RPI	1380
9mm BFS	24.75 mm	.357 Mag BFS	32.1 mm		