


GH PRO

PRO IIIA

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL
IIIA

STANDARDS	NIJ 0101.04 2005 Interim Requirement
NIJ MODEL SERIES	GH-3A-0408 Pro
THREAT LEVEL	IIIA
GENDER	Neutral
AREAL DENSITY	1.26 psf
THINNESS	0.30"
PLY COUNT	11
COMPOSITION	Aramid Laminate
STITCHING	Diamond Quilt
PANEL COVER	Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

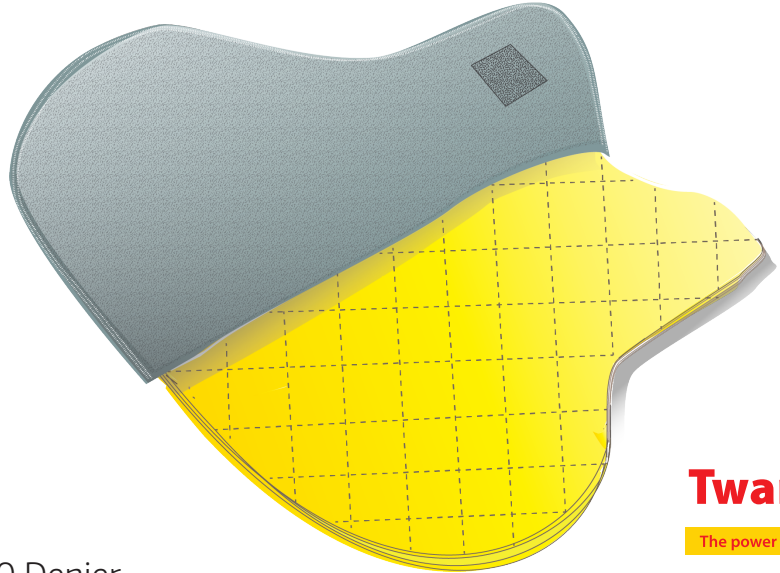

Twaron®
The power of Aramid



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm V50	1714 fps	.357 V50	1624 fps	.44 Mag V50	1642 fps
9mm RPI	1360.0	.357 RPI	1288.0	.44 Mag RPI	1303.0
9mm BFS	26.1 mm			.44 Mag BFS	36.1 mm

1 Sentry Drive | PO Box 280 | Dover, TN 37058
866-920-5940 | www.gharmor.com

GH ARMOR

©2021 GH Armor Systems