


STANDARDS	NIJ 0101.06 NIJ 0115.00
NIJ MODEL	GPMII2-4
SERIES	TX02
THREAT LEVELS	Level II Spike 2
GENDER	Neutral
AREAL DENSITY	1.10 psf
THINNESS	0.34"
PLY COUNT	36
SIZE RANGE	C1-C5
COMPOSITION	Kevlar® Hybrid
STITCHING	Diamond Quilt, Top Stitch
PANEL COVER	Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
DESICCANT	Patented ProProtect® Material
WARRANTY	5 Years



DuPont™  
**KEVLAR®**

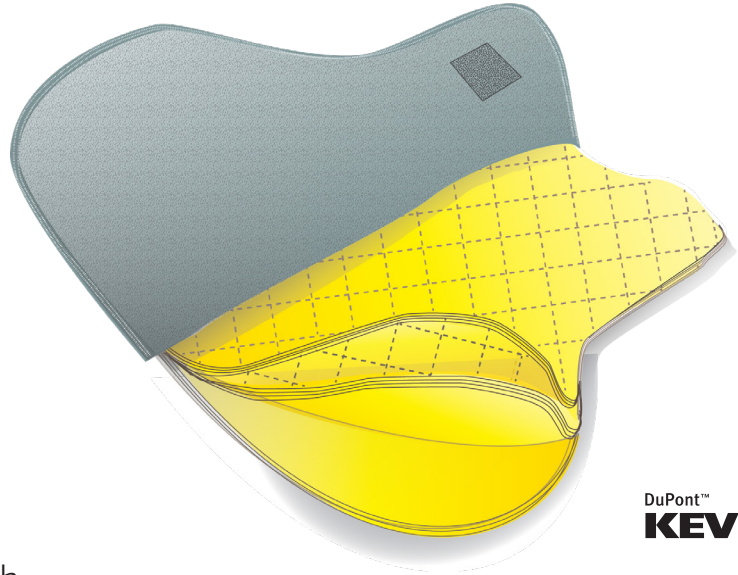

### BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1618 fps	.357 Mag New V50	1574 fps
9mm Conditioned V50	1624 fps	.357 Mag Conditioned V50	1542 fps
9mm BFS	27.7 mm	.357 Mag BFS	31.3 mm
9mm New RPI	1471	.357 Mag New RPI	1431
9mm Conditioned RPI	1476	.357 Mag Conditioned RPI	1402

### SPIKE RESISTANCE RATING

Protection Threat	Level 2	Energy Level 1 (E1)/Joules	24.3ft-lbs/33J
Protection Class	Spike	Energy Level 2 (E2)/Joules	36.9ft-lbs/50J

**WARNING:** This product is not intended to protect the wearer from commercially-made edged weapons or rifle fire.