


| | |
|---------------|--|
| STANDARD | NIJ 0101.06 |
| NIJ MODEL | GPHII |
| SERIES | HX04 |
| THREAT LEVEL | II |
| GENDER | Neutral |
| AREAL DENSITY | 0.75 psf |
| THINNESS | 0.185" |
| PLY COUNT | 36 |
| SIZE RANGE | C1-C5 |
| COMPOSITION | Twaron®, Goldshield® |
| PANEL COVER | Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System |
| WARRANTY | 5 Years |



Twaron®
The power of Aramid
Honeywell

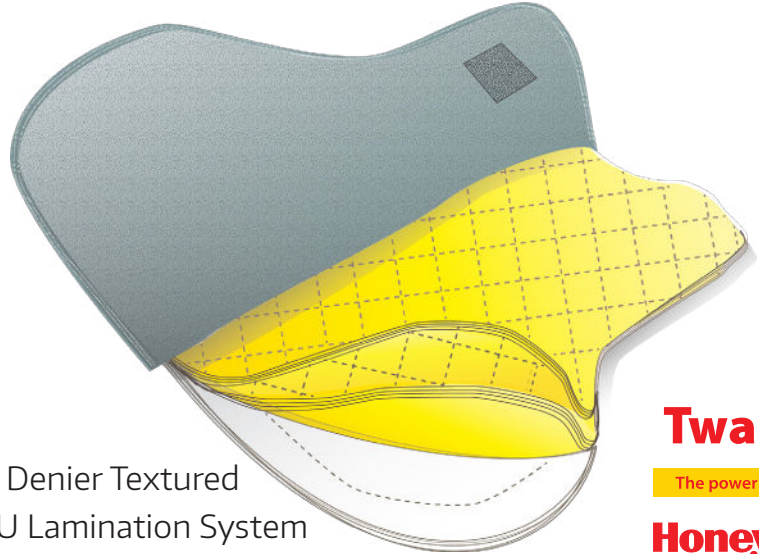

BALLISTIC PERFORMANCE AT CERTIFICATION

| | | | |
|---------------------|----------|--------------------------|----------|
| 9mm New V50 | 1703 fps | .357 Mag New V50 | 1668 fps |
| 9mm Conditioned V50 | 1558 fps | .357 Mag Conditioned V50 | 1496 fps |
| 9mm BFS | 35.3 mm | .357 Mag BFS | 35.4 mm |
| 9mm New RPI | 2271 | .357 Mag New RPI | 2224 |
| 9mm Conditioned RPI | 2077 | .357 Mag Conditioned RPI | 1995 |

SPECIAL THREAT TESTING

9mm 127gr SXT +P+ RA9TA | 9mm 124 gr. JHP | 5.7 x 28mm 28 gr. SS195 LF HP
40 S&W 165 gr. SXT | .357 SIG 125gr GDHP
Special threat testing conducted at NIJ certified independent laboratory